



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|   |    |   |
|---|----|---|
| (51) International Patent Classification <sup>6</sup> :<br>C08J 9/36, B65D 81/24  | A1 | (11) International Publication Number: WO 96/38495<br>(43) International Publication Date: 5 December 1996 (05.12.96)   |
| (21) International Application Number: PCT/US96/07939<br>(22) International Filing Date: 29 May 1996 (29.05.96)<br>(30) Priority Data:<br>08/453,018 30 May 1995 (30.05.95) US<br>(71) Applicant: LANDEC CORPORATION [US/US]; 3603 Haven Avenue, Menlo Park, CA 94025-1010 (US).<br>(72) Inventors: CLARK, Raymond; 1394 Marinovich Way, Los Altos, CA 94025 (US). STEWART, Ray, F.; 634 Handley Trail, Redwood City, CA 94062 (US). YOON, Valentine, Y.; 1413-8, Kan Ho 3Ka, Seoul (KR). SCHULTZ, Donald; 3901 Marshall Avenue, San Mateo, CA 94400 (US). McCLARY, Bradley; 4741 Golden Road, Pleasanton, CA 94566 (US).<br>(74) Agents: SHELDON, Jeffrey, G. et al.; Sheldon & Mak, Suite 900, 225 South Lake Avenue, Pasadena, CA 91101 (US).  |    | (81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).<br><br>Published<br><i>With international search report.<br/>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> |
| (54) Title: GAS-PERMEABLE MEMBRANE<br><br>(57) Abstract<br><br>Novel gas-permeable membranes which are particularly useful in the packaging of fresh cut fruit and vegetables, and other respiring biological materials. The membranes have an O <sub>2</sub> permeability of at least 775,000 ml/m <sup>2</sup> .atm.24hrs, a P <sub>10</sub> ratio of at least 1.3, and a ratio of CO <sub>2</sub> permeability to O <sub>2</sub> permeability (R) of at least 1.5, and are made by forming thin polymeric coatings on microporous polymeric films. Preferred coating polymers are side chain crystalline polymers. Preferred microporous films contain inorganic fillers, particularly such films based on ultrahigh molecular weight polyethylene or polypropylene. Figure (I) illustrates how O <sub>2</sub> permeability and R ratio vary for different coating polymers and microporous films. |    |   |

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |                          |
|----|--------------------------|----|--|----|--------------------------|
| AM | Armenia                  | GB | United Kingdom                           | MW | Malawi                   |
| AT | Austria                  | GE | Georgia                                  | MX | Mexico                   |
| AU | Australia                | GN | Guinea                                   | NE | Niger                    |
| BB | Barbados                 | GR | Greece                                   | NL | Netherlands              |
| BE | Belgium                  | HU | Hungary                                  | NO | Norway                   |
| BF | Burkina Faso             | IE | Ireland                                  | NZ | New Zealand              |
| BG | Bulgaria                 | IT | Italy                                    | PL | Poland                   |
| BJ | Benin                    | JP | Japan                                    | PT | Portugal                 |
| BR | Brazil                   | KE | Kenya                                    | RO | Romania                  |
| BY | Belarus                  | KG | Kyrgyzstan                               | RU | Russian Federation       |
| CA | Canada                   | KP | Democratic People's Republic<br>of Korea | SD | Sudan                    |
| CF | Central African Republic | KR | Republic of Korea                        | SE | Sweden                   |
| CG | Congo                    | KZ | Kazakhstan                               | SG | Singapore                |
| CH | Switzerland              | LI | Liechtenstein                            | SI | Slovenia                 |
| CI | Côte d'Ivoire            | LK | Sri Lanka                                | SK | Slovakia                 |
| CM | Cameroon                 | LR | Liberia                                  | SN | Senegal                  |
| CN | China                    | LT | Lithuania                                | SZ | Swaziland                |
| CS | Czechoslovakia           | LU | Luxembourg                               | TD | Chad                     |
| CZ | Czech Republic           | LV | Latvia                                   | TG | Togo                     |
| DE | Germany                  | MC | Monaco                                   | TJ | Tajikistan               |
| DK | Denmark                  | MD | Republic of Moldova                      | TT | Trinidad and Tobago      |
| EE | Estonia                  | MG | Madagascar                               | UA | Ukraine                  |
| ES | Spain                    | ML | Mali                                     | UG | Uganda                   |
| FI | Finland                  | MN | Mongolia                                 | US | United States of America |
| FR | France                   | MR | Mauritania                               | UZ | Uzbekistan               |
| GA | Gabon                    |    |  | VN | Viet Nam                 |

GAS-PERMEABLE MEMBRANE

This invention relates to gas-permeable membranes and their use in packaging,  
5 especially the packaging of fresh produce.

Fresh cut fruit and vegetables, and other respiring biological materials consume oxygen ( $O_2$ ) and produce carbon dioxide ( $CO_2$ ), at rates which depend upon temperature and the stage of their development. Their storage stability depends on the relative and  
10 absolute concentrations of  $O_2$  and  $CO_2$  in the atmosphere surrounding them, and on temperature. Ideally, a respiring material should be stored in a container whose permeability to  $O_2$  and  $CO_2$  is correlated with (i) the atmosphere outside the package, (ii) the rates at which the material consumes  $O_2$  and produces  $CO_2$ , and (iii) the temperature, to produce an atmosphere within the container having  $O_2$  and  $CO_2$  concentrations equal to  
15 the optimum values for preservation of the material. The permeability to water vapor may also be significant. This is the principle behind the technology of controlled atmosphere packaging (CAP) and modified atmosphere packaging (MAP), as discussed, for example, in US Patent Nos. 4,734,324 (Hill), 4,830,863 (Jones), 4,842,875 (Anderson), 4,879,078 (Antoon), 4,910,032 (Antoon), 4,923,703 (Antoon), 5,045,331 (Antoon), 5,160,768 (Antoon) and 5,254,354 (Stewart), and European Patent Applications  
20 Nos. 0,351,115 and 0,351,116 (Courtaulds). The disclosure of each of these publications is incorporated herein by reference.

The preferred packaging atmosphere depends on the stored material. For example,  
25 some materials, e.g. broccoli, are best stored in an atmosphere containing 1-2%  $O_2$  and 5-10%  $CO_2$ . For other materials, an atmosphere containing 1-2%  $O_2$  and 12-30%  $CO_2$ , e.g. about 15%  $CO_2$ , is preferred. Thus,  $CO_2$  concentrations of 10 to 30% slow the respiration rate of some fruit and reduce the activity of some decay-causing organisms; for example, a  $CO_2$  concentration of 20% delays grey mold decay in raspberries and extends their shelf  
30 life.

Although much research has been carried out, known packaging techniques have many shortcomings for respiring biological materials. We have discovered, in accordance with this invention, that by forming thin polymeric coatings on microporous films, it is possible to create gas-permeable membranes which have novel and desirable combinations of  $O_2$  permeability, change in  $O_2$  permeability with temperature, and ratio of  $CO_2$  permeability to  $O_2$  permeability. Improved results can be obtained using a wide range of microporous base films and coating polymers. However, a particular advantage of the present invention is that it makes it possible to design packages which are tailored to the requirements of particular respiring materials. As further discussed below, the gas-permeable membranes of this invention are generally used as control sections which provide the sole, or at least the principal, pathway for gases to enter or leave a sealed container containing a respiring material.

In describing the invention below, the following abbreviations, definitions, and methods of measurement are used. OTR is  $O_2$  permeability. COTR is  $CO_2$  permeability. OTR and COTR values are given in  $ml/m^2 \cdot atm \cdot 24 \text{ hrs}$ , with the equivalent in  $cc/100 \text{ inch}^2 \cdot atm \cdot 24 \text{ hrs}$  given in parentheses. OTR and COTR were measured using a permeability cell (supplied by Millipore) in which a mixture of  $O_2$ ,  $CO_2$  and helium is applied to the sample, using a pressure of  $0.7 \text{ kg/cm}^2$  (10 psi) except where otherwise noted, and the gases passing through the sample were analyzed for  $O_2$  and  $CO_2$  by a gas chromatograph. The cell could be placed in a water bath to control the temperature. The abbreviation  $P_{10}$  is used to denote the ratio of the oxygen permeability at a first temperature  $T_1^\circ C$  to the oxygen permeability at a second temperature  $T_2$ , where  $T_2$  is  $(T_1 - 10)^\circ C$ ,  $T_1$  being  $10^\circ C$  and  $T_2$  being  $0^\circ C$  unless otherwise noted. The abbreviation  $R$  is used to denote the ratio of  $CO_2$  permeability to  $O_2$  permeability, both permeabilities being measured at  $20^\circ C$  unless otherwise noted. Pore sizes given in this specification are measured by mercury porosimetry or an equivalent procedure. Parts and percentages are by weight, temperatures are in degrees Centigrade, and molecular weights are weight average molecular weights expressed in Daltons. For crystalline polymers, the

abbreviation  $T_o$  is used to denote the onset of melting, the abbreviation  $T_p$  is used to denote the crystalline melting point, and the abbreviation  $\Delta H$  is used to denote the heat of fusion.  $T_o$ ,  $T_p$  and  $\Delta H$  are measured by means of a differential scanning calorimeter (DSC) at a rate of 10°C/minute and on the second heating cycle.

5

Typically, a microporous film has an R ratio of about 1, and OTR and COTR values which (i) are very high, (ii) do not change much with the thickness of the film, and (iii) do not change much with temperature (leading to  $P_{10}$  ratios of about 1). A continuous polymeric layer, on the other hand, typically has an R ratio substantially greater than 1 (generally 2 to 6, depending on the polymer itself), and has OTR and COTR values which (i) are relatively low, (ii) are inversely proportional to the thickness of the layer, and (iii) change substantially with temperature (leading to  $P_{10}$  ratios substantially greater than 1, generally at least 1.3). At practical thicknesses, such continuous polymeric layers have OTR and COTR values which are undesirably low.

15

We have discovered that when a membrane is prepared by coating a thin layer of a polymer onto a suitable microporous film, it has permeability characteristics which depend on both the coating polymer and the microporous film. We do not know exactly why this is so, and the results achieved by this invention do not depend upon any theory of its operation. However, we believe that the coating polymer effectively blocks most, but not all, of the pores of the microporous film (with the smaller pores being preferentially blocked); and that as a result, the permeability of the membrane results in part from gases which pass through the unblocked pores and in part from gases which pass through the coating polymer. In any event, the invention makes it possible to prepare novel membranes having very desirable permeability characteristics, and to achieve controlled variation of those characteristics. For example, the invention makes it possible to prepare membranes having an OTR greater than 775,000 (50,000), e.g. 1,550,000 (100,000) to 3,875,000 (250,000), or even higher, e.g. up to 7,750,000 (500,000) or more, a  $P_{10}$  ratio of at least 1.3, e.g. at least 2.6, and an R ratio of at least 1.5, e.g. at least 2.0.

30

The microporous film and the coating polymer must be selected and correlated to produce a membrane having particular properties, but those skilled in the art will have no difficulty, having regard to the disclosure in this specification and their own knowledge, in achieving a wide range of useful results.

The size and distribution of the pores in the microporous film are important factors. If the pores are too small, the coating polymer tends to form a continuous layer which is either too thin to be durable under routine handling, or too thick to have an acceptable OTR. If the pores are too large, the coating polymer may be unable to bridge over them, so that the coating polymer plays little or no part in determining the permeability characteristics of the membrane. This may happen even if the average pore size is relatively low, if the pores have a wide range of sizes; for example the coating polymer may effectively block many of the pores, but still fail to block the larger pores, whose permeability then dominates the permeability of the membrane as a whole.

The roughness of the microporous film can also be an important factor. The coating weight of the coating polymer must be very small, and in consequence the thickness of the coating polymer is also very small. If such a thin layer is in intimate contact with an irregular surface, it is more likely to be able to withstand abrasive forces during use than a layer of the same thickness which lies on a relatively smooth surface.

The coating polymer should be selected so that the membrane has a desired  $P_{10}$  ratio and a desired R ratio, and should be coated onto the microporous film at a coating weight which results in a membrane having the desired balance between the permeability characteristics of the microporous film and of the coating polymer. For example, by choosing a crystalline coating polymer whose  $T_p$  is within or a little below an expected range of storage temperatures, it is possible to produce a membrane whose  $P_{10}$  is relatively large in the storage temperature range; furthermore, the size of the  $P_{10}$  ratio can be increased by increasing the  $\Delta H$  of the coating polymer. Similarly, a membrane having

a relatively large (or small) R ratio can be produced by selecting a coating polymer having a relatively high (or small) inherent R ratio. In this way, the invention makes it possible to produce membranes whose properties can be tailored, much more closely than is now possible, to the needs of a particular respiring biological material.

5

In a first preferred aspect, this invention provides a gas-permeable membrane which comprises

- (a) a microporous polymeric film, and
  - (b) a polymeric coating on the microporous film, the polymeric coating  
10 changing the permeability of the microporous film so that the membrane
    - (i) has a  $P_{10}$  ratio, over at least one  $10^{\circ}\text{C}$  range between  $-5$  and  $15^{\circ}\text{C}$ , of at least 1.3;
    - (ii) has an oxygen permeability (OTR), at all temperatures between  $20^{\circ}$  and  $25^{\circ}\text{C}$ , of at least  $775,000 \text{ ml/m}^2 \cdot \text{atm} \cdot 24 \text{ hrs}$  ( $50,000 \text{ cc/100}$   
15  $\text{inch}^2 \cdot \text{atm} \cdot 24 \text{ hrs}$ ); and
    - (iii) has an R ratio of at least 1.5;
- the  $P_{10}$ , OTR and R values being measured at a pressure of  $0.035 \text{ kg/cm}^2$ .

In a second preferred aspect, this invention provides a package which is stored in  
20 air and which comprises

- (a) a sealed container, and
- (b) within the sealed container, a respiring biological material and a packaging atmosphere around the biological material

the sealed container including one or more permeable control sections which provide  
25 substantially the only pathways for oxygen and carbon dioxide to enter or leave the packaging atmosphere, at least one said permeable control section being a gas-permeable membrane as defined in the first aspect of the invention.

Microporous Base Films

The microporous base film used in this invention comprises a polymeric matrix which provides a network of interconnected pores such that gases can pass through the film. The average pore size of the base film can be 0.02 to 5 micron, but is preferably  
5 greater than 0.05 micron and less than 0.24, particularly less than 0.20, especially less than 0.15, micron. Preferably at least 70%, particularly at least 90%, of the pores have a pore size of less than 0.24 micron. Preferably, at least 60%, particularly at least 80%, of the pores have a pore size of less than about 0.15 micron. Particularly at least 60%,  
10 especially at least 70%, of the pores have a pore size of less than about 0.11 micron. The pores preferably constitute 35 to 80%, particularly 60 to 75%, by volume of the film. A narrow range of pore sizes is preferred. For example, it is preferred that less than 20% of the pores have a size less than 0.014 micron, and that less than 20% of the pores have a pore size greater than 0.13 micron.

15 It is highly desirable that the base film should have sufficient strength (and other physical properties) to ensure that it is not damaged in processing or in use as part of a container. Accordingly, the base film preferably has a tear strength of at least 30g, particularly at least 70g, when measured by the following test. A sample of the film, 10  
20 by 1.27 cm, is used. A slit 5 mm long is made in one of the short sides. The two flaps on either side of the slit are placed in opposing jaws of an Instron tensile tester, and the tear strength measured at a jaw separation rate of 12.7 cm (5 inch)/minute. If the base film has too low a tear strength, it is possible to prepare a satisfactory membrane by laminating the base film, before or after it has been coated, to a support film which has a satisfactory tear  
25 strength and sufficient porosity that its presence does not adversely affect the permeability of the coated membrane. However, the added cost of this expedient is highly undesirable.

It is also preferred that the microporous base film should have a Sheffield  
smoothness of at least 30. It is also preferred that the base film is composed of a material  
30 that can be heat-sealed.



Preferred polymers for polymeric matrix of the base film are

- (1) essentially linear ultrahigh molecular weight polyethylene having an intrinsic viscosity of at least 18, preferably 18 to 39, deciliters/gram,
- 5 (2) essentially linear ultrahigh molecular weight polypropylene having an intrinsic viscosity of at least 6 deciliters/gram, and
- (3) mixtures of (1) and (2).

The preferred base film includes a finely divided, particulate, substantially water-  
10 insoluble, inorganic filler, for example a siliceous filler, which is distributed throughout the matrix and which is present in amount 50 to 90%, particularly 50 to 85%, by weight of the base film. The filler is preferably silica, particularly precipitated silica, especially silica having an average ultimate particle size of less than 0.1 micrometer. Preferably the filler occupies 35 to 80% of the total volume of microporous film. Particularly preferred,  
15 because they have a relatively narrow range of pore sizes, are films made by stretching a film which contains an inorganic filler and a processing oil, e.g. a paraffinic oil, naphthenic oil or aromatic oil, uniformly distributed therein. Suitable films are disclosed, for example, in US Patent Nos. 4,937,115 and 3,351,495, the disclosures of which are incorporated herein by reference. Such films are sold by PPG Industries under the  
20 tradename "Teslin".

The thickness of the base film is preferably 0.03 to 0.65 mm.

The microporous base film can be modified by calendering at a nip pressure of  
25 17.8 to 266.6 kg per linear cm (100 to 1500 pli). We have found that calendering the base film results in coated films which have reduced OTR values and increased R values. The base film can be uniaxially or biaxially calendered. The base film can also be stretched, uniaxially or biaxially.

### Coating Polymers

The coating polymer can be a single polymer or a mixture of two or more different polymers. Preferably the coating polymer is a crystalline polymer having a  $T_p$  of -5 to +40°C, particularly -5 to 15°C, particularly 0 to 15°C, e.g. 1° to 15°C, and a  $\Delta H$  of at least 5 J/g, particularly at least 20 J/g. We have found that the higher the  $\Delta H$  of the polymer, the higher its  $P_{10}$  value over temperature ranges which include  $T_p$ . The  $T_p$  and  $T_o$  values of the polymer are preferably such that  $T_p - T_o$  is less than 10°C, particularly 5 to 10°C. Suitable polymers include those described in US Patent No. 5,254,354, the disclosure of which is incorporated herein by reference. Particularly preferred are side chain crystalline (SCC) polymers. SCC polymers can be prepared for example by copolymerizing (i) at least one n-alkyl acrylate or methacrylate in which the n-alkyl group contains at least 12 carbon atoms, preferably one or more of docosanyl, octadecyl, hexadecyl, tetradecyl, and dodecyl acrylates, and (ii) one or more comonomers selected from acrylic acid, methacrylic acid, and esters of acrylic or methacrylic acid in which the esterifying group contains less than 10 carbon atoms, e.g. hydroxyethyl butyl, hexyl, or 2-ethyl hexyl. These SCC polymers generally have a high R ratio, e.g. greater than 5. Other polymers which can be used include cis-polybutadiene, poly(4-methylpentene), polydimethyl siloxanes, and ethylene-propylene rubbers. The polymer can be crosslinked after it has been applied, for example to reduce its tackiness.

### Coating Compositions

The coating polymer is preferably applied to the porous substrate as a coating composition which comprises the coating polymer dissolved in a suitable solvent, e.g. toluene, tetrahydrofuran, heptane or methyl ethyl ketone. After the composition has been applied, the solvent is removed by heating, leaving the polymer adherent to the substrate. The concentration of the coating polymer in the coating composition is preferably 2 to 12%, e.g. 5 to 10%, based on the weight of the composition. The coating composition can contain other ingredients in addition to the polymer and the solvent, for example a

crosslinking agent which is activated after the solvent has been removed, e.g. aluminum acetyl acetate or a polyfunctional aziridine such as the product available from Aldrich Chemicals under the tradename XAMA 7.

#### 5    Application of the Coating Compositions

The coating can be carried out in any convenient way, for example by hand, using a Meyer rod, or using commercially available coating equipment, e.g. gravure-coating equipment, which is preferred, or knife-over-roll equipment. A single coating is normally  
10    adequate, but a second coating of the same or a different coating composition can be applied after drying the first. Preferably the coating is carried out using a gravure coating roll having a theoretical cell volume of  $31 \times 10^6$  to  $232.5 \times 10^6$  cubic microns per  $\text{mm}^2$  ( $20 \times 10^9$  to  $150 \times 10^9$  cubic microns per  $\text{inch}^2$ ), preferably  $62 \times 10^6$  to  $124 \times 10^6$  cubic microns per  $\text{mm}^2$  ( $40 \times 10^9$  to  $80 \times 10^9$  cubic microns per  $\text{inch}^2$ ), or using equipment which  
15    provides a similar coating weight. The coating weight is preferably 1.7 to 2.9  $\text{g/m}^2$ .

#### Properties of the Membranes

As discussed above, the properties of the membranes of the invention depend  
20    upon a number of factors, including the base film, the coating polymer, the coating composition, and the amount of coating composition applied to the base film. The membrane preferably has a  $P_{10}$  ratio, over at least one  $10^\circ\text{C}$  range between  $-5$  and  $15^\circ\text{C}$ , preferably over at least one  $10^\circ\text{C}$  range between  $0^\circ\text{C}$  and  $15^\circ\text{C}$ , of at least 1.3, preferably at least 2, particularly at least 2.5, especially at least 2.6. The membrane preferably has an  
25    OTR of 775,000 to 7,750,000 (50,000 to 500,000), preferably 1,550,000 to 3,875,000 (100,000 to 25,000), particularly at least 2,325,000 (150,000). When the OTR is 775,000 to 3,100,000 (50,000 to 200,000), the R ratio of the membrane is preferably at least 2, particularly at least 2.5, especially at least 3; and when the OTR is 775,000 to 3,100,000 (50,000 to 200,000), the R ratio is preferably more than  $3.8 - 0.00000045 P'$  ( $3.8 -$   
30     $0.000007P$ ), particularly up to  $7.4 - 0.00000116 P'$  ( $7.4 - 0.000018P$ ), especially up to  $5.6 -$

0.0000084  $P'$  (5.6-0.000013 $P$ ), where  $P'$  is the OTR in ml/m<sup>2</sup>·atm·24 hrs, and  $P$  is the OTR in cc/100 inch<sup>2</sup>·atm 24 hrs. The membrane preferably also has these values for OTR and  $R$  when the OTR and COTR are measured at any temperature between 20°C and 25°C. The membrane preferably has these values for OTR,  $P_{10}$  and  $R$  both when the O<sub>2</sub> and CO<sub>2</sub> permeabilities are measured at 0.7 kg/cm<sup>2</sup> (10 psi) and when they are measured at 0.035 kg/cm<sup>2</sup> (0.5 psi).

The membrane can be covered by a covering layer, so that the polymeric coating is sandwiched between the microporous film and the covering layer, providing that the covering layer is sufficiently porous not to have an adverse effect on permeability. The covering layer is generally different from, but can be the same as, the base film. The cover layer can be melt-bonded to the coated film. However, the use of a covering layer adds to the cost of the product.

The properties of the membrane can be modified by calendering, uniaxially or biaxially, preferably at a nip pressure of 17.8 to 266.6 kg per linear cm (100 to 1500 pli). We have found that calendering reduces the OTR and increases the  $R$  ratio of the membrane.

## Containers

The properties of the membranes are such that they can be used to control the atmosphere within a container whose walls are relatively impervious to gases except over one or more control sections, the control section, or at least one of the control sections if there are two or more, being provided by a membrane of the invention. In one embodiment, the control section is an aperture which lies in a gas-impervious wall of the container and which is covered by a membrane of the invention. The aperture can be, for example, 5 to 50% of the total wall area of the container. The container can be, for example, a bag of flexible polymeric material, e.g. a laminate of two different polymeric films. Preferably the uncoated side of the membrane is secured, e.g. heat-sealed, impulse-

sealed, or radio frequency sealed, to the container, around the periphery of the aperture. For this purpose, the outer surface of the container is preferably composed of a material which can be heat-sealed to the base film. In a typical procedure, the membrane is heat-sealed to the enclosure using an impulse sealer at 115°C for 0.4 secs.

5

In another embodiment, the membrane is in the form of a strip which runs down the length of the container, or which otherwise extends across a complete dimension of the container. This has the advantage that the strip can be incorporated into the sheet material from which the bag or other container is made, so that it is not necessary to add individual patches to each container. Another advantage is that the strip is less likely to interfere with graphical design on the container.

The size of the containers can vary considerably. In one category, the container contains up to 2.26 kg (5 lb) of produce. In another category, the containers are much larger, e.g. containing up to 1500 lb (680 kg) of produce.

15

A wide range of respiring biological materials can be packaged in containers of the invention, including broccoli, cut lettuce, cauliflower, mushrooms, asparagus, and strawberries.

20

### EXAMPLES

The invention is illustrated in the following Examples, a number of which are comparative Examples. In the Examples, the coating polymers used are often referred to by the following abbreviations.

25

SCC 1-15 and ACP. These acrylate polymers were prepared by polymerizing the monomers and parts by weight thereof shown in Table 1. In Table 1, the following abbreviations are used for the monomers. AA is acrylic acid, MAA is methacrylic acid, EHA is 2-ethylhexyl acrylate, C4A is butyl acrylate, C6A is hexyl acrylate, C6DA is hexyldiacrylate, C12A is dodecyl acrylate, C12DA is dodecyl diacrylate, C14A is

30

tetradecyl acrylate, C16A is hexadecyl acrylate, and C22A is behenyl acrylate. The monomers were copolymerized in a suitable solvent, e.g. toluene or a mixture of heptane and butyl acetate or ethyl acetate, using a suitable initiator, e.g. azobisisobutyronitrile (AIBN). For example, SCC11 was made by mixing the C6A and C14A with 0.31 parts of AIBN in a 4:1 mixture of heptane and ethyl acetate, and maintaining the mixture at 50°C for 2 days, to give a product having a weight average molecular weight of about 970,000 and a  $T_g$  of about 12.5°C. SCC 5 was made by polymerizing the C22A alone, functionalizing the resulting homopolymer with isocyanatoethylmethacrylate, and then polymerizing the other monomers with the functionalized homopolymer. The  $\Delta H$  values of the SCC12, SCC13, and SCC14 polymers were 0, 35 and 55 J/g respectively.

Table 1

|       | AA | MAA | EHA | C4A | C6A | C6DA | C12A | C12DA | C14A | C16A | C22A |
|-------|----|-----|-----|-----|-----|------|------|-------|------|------|------|
| SCC1  | 5  | -   | -   | -   | -   | -    | 47.5 | -     | -    | 47.5 | -    |
| SCC2  | 5  | -   | -   | -   | -   | -    | 65   | -     | -    | 30   | -    |
| SCC3  | -  | 5   | -   | -   | -   | -    | 47.5 | -     | 47.5 | -    | -    |
| SCC4  | 5  | -   | -   | -   | -   | -    | 60   | -     | -    | 35   | -    |
| SCC5  | 3  | -   | -   | -   | -   | -    | 20   | -     | 60   | -    | 20   |
| SCC6  | -  | -   | -   | -   | -   | -    | 65   | 0.25  | -    | 35   | -    |
| SCC7  | 1  | -   | -   | -   | -   | -    | 64   | 0.1   | -    | 35   | -    |
| SCC8  | -  | -   | -   | -   | -   | -    | -    | -     | 100  | -    | -    |
| SCC9  | -  | 5   | -   | -   | -   | -    | 47.5 | -     | 47.5 | -    | -    |
| SCC10 | 3  | -   | -   | -   | -   | -    | -    | -     | 57   | 40   | -    |
| SCC11 | -  | -   | -   | -   | 15  | -    | -    | -     | 85   | -    | -    |
| SCC12 | -  | 5   | -   | -   | 15  | -    | -    | -     | 80   | -    | -    |
| SCC13 | 3  | -   | -   | -   | 42  | -    | -    | -     | 55   | -    | -    |
| SCC14 | -  | -   | -   | -   | 15  | -    | -    | -     | 85   | -    | -    |
| SCC15 | -  | -   | -   | -   | -   | -    | -    | -     | 100  | -    | -    |
| ACP   | 6  | -   | 47  | 47  | -   | -    | -    | -     | -    | -    | -    |

CisPB is cis-polybutadiene available from Aldrich Chemical Co. Tflex is an aliphatic polyurethane available under the tradename Tecoflex SG80A from Thermedics Corp. Sil

is a moisture-curable, RTV (room-temperature vulcanizable) polydimethyl siloxane available under the tradename Silastic 734 from Dow Corning Corporation. Kton is a styrene-ethylene-butylene block copolymer available under the trade name Kraton from Shell Chemical Co. TPX is poly-(4-methyl pentene) available under the tradename TPX from Aldrich Chemicals.

These polymers were used in coating solutions of various concentrations. The SCC and ACP polymers were prepared in solution and were diluted to the desired concentration by addition of a suitable solvent, e.g. heptane. The CisPB, the mixtures of CisPB and SCC8, and the Sil polymers were dissolved in toluene; the Tflex polymers were dissolved in tetrahydrofuran; and the Kraton polymers were dissolved in toluene.

The substrates used in the Examples are often referred to by the following abbreviations. CG is a porous polyethylene film having a porosity of about 55% and a pore size of about 0.25 microns, available under the tradename Celgard K878 from Hoechst Celanese Corp. MSX is a porous polyethylene film available under the tradename MSX 1137P from 3M Co. Van L is a filled porous polyethylene film available under the tradename Van Leer 10X from Van Leer Corp. Teslin SP7 is a filled porous polyethylene films containing about 60% silica, having a thickness of about 0.18 mm (0.007 inch), a tear strength measured as described above of about 90g, a porosity of about 65%, an average pore size of about 0.1 micron and a largest pore size of 4-10 microns. Teslin X457 is similar to Teslin SP7 but is more porous. Both Teslins are available under the tradename Teslin from PPG Industries. When tested by mercury porosimetry, the distribution of pore sizes in Teslin SP7 was as follows.

|                                  |      |      |      |      |      |     |     |     |     |     |    |
|----------------------------------|------|------|------|------|------|-----|-----|-----|-----|-----|----|
| Pore Size (microns)              | .013 | .016 | .026 | .044 | .058 | .08 | .11 | .15 | .24 | .36 | .6 |
| % of pores larger than pore size | 90%  | 80%  | 70%  | 60%  | 50%  | 40% | 30% | 20% | 10% | 5%  | 2% |

AKZO is a porous polypropylene film in which the pores have a size of 0.1 to 0.29 micron, available under the tradename Akzo 1EPP from Enka AG. Delnet is a perforated high density polyethylene film, 0.11 mm (4.5 mil) thick, with an open area of about 36%, available under the tradename Delnet from Applied Extrusion Technologies. BF 915,  
5 Roplast, LB710 and CVP are commercially available laminate packing films in which one layer is polyethylene, available from Barrier, Roplast, Golden Eagle and CVP respectively.

The procedure used to coat the substrates was to apply the coating solution with a  
10 #30 Meyer rod, and to dry the coating in ambient air for 15 minutes and then at 83°C for 30 minutes.

#### Examples 1-10 and C1-4

15 Examples 1-10 and C1-4 are summarized in Tables 2-4 below. In each of the tests, the substrate identified in Table 2 was coated with a solution containing the identified percentage of the identified coating polymer. The coated substrate was dried, and its permeability to O<sub>2</sub> and CO<sub>2</sub> was measured at the temperature indicated in Table 2. The results are reported in Table 2. In some cases, the P<sub>10</sub> ratios were calculated, as  
20 shown in Tables 3 and 4. The P<sub>10</sub> ratios in Examples 8-10 demonstrate how the increasing ΔH values of SCC13 - SC15 result in increasing P<sub>10</sub> ratios.

The OTR and R values of some of the Examples are shown graphically in Figure 1 of the accompanying drawings. In Figure 1, curve 1 represents comparative Examples 1K  
25 to 1N (SCC 1 on Van Leer), curve 2 represents comparative Examples 1H-J (SCC1 on MSX), curve 3 represents Examples 2O-Q (TPX on Teslin SP7), curve 4 represents Examples 1P, Q and R (SCC1 on Teslin SP7), and curve 5 represents Examples 2H to 2K (cis PB + SCC8 on Teslin SP7).



Table 2

| Ex No. | Substrate  | Coating Polymer |     | Permeability        |                                       |    |
|--------|------------|-----------------|-----|---------------------|---------------------------------------|----|
|        |            | Type            | %   | OTR                 | Ratio CO <sub>2</sub> /O <sub>2</sub> | °C |
| *1A    | CG         | SCC1            | 2   | **                  | 1.0                                   | 20 |
| *B     |            |                 | 5   | **                  | 1.0                                   | 20 |
| *C     |            |                 | 10  | **                  | 1.0                                   | 20 |
| *D     |            |                 | 20  | **                  | 1.0                                   | 20 |
| *E     | MSX        | SCC1            | 2   | **                  | 1.0                                   | 20 |
| *F     |            |                 | 5   | **                  | 1.0                                   | 20 |
| *G     |            |                 | 10  | **                  | 1.0                                   | 20 |
| *H     |            |                 | 20  | 487,475 (31,450)    | 1.86                                  | 20 |
| *I     |            |                 | 25  | 63,689 (4,109)      | 5.75                                  | 20 |
| *J     |            |                 | 30  | 44,175 (2,850)      | 6.5                                   | 20 |
| *K     | Van L      | SCC1            | 2   | 403,077 (26,005)    | 1.32                                  | 20 |
| *L     |            |                 | 5   | 29,636 (1,912)      | 3.92                                  | 20 |
| *M     |            |                 | 10  | 62,558 (4,036)      | 2.39                                  | 20 |
| *N     |            |                 | 20  | 62,310 (4,020)      | 2.42                                  | 20 |
| O      | Teslin SP7 | SCC1            | 2   | 2,413,458 (155,707) | 2.95                                  | 20 |
| P      |            |                 | 5   | 1,021,140 (65,880)  | 4.86                                  | 20 |
| Q      |            |                 | 10  | 602,547 (38,874)    | 5.22                                  | 20 |
| R      |            |                 | 20  | 425,025 (27,421)    | 5.48                                  | 20 |
| 2A     | Teslin SP7 | Tflex           | 5   | 1,076,537 (69,454)  | 2.34                                  | 20 |
| B      |            |                 | 7   | 238,024 (15,368)    | 5.9                                   | 20 |
| C      |            |                 | 15  | 108,856 (7,023)     | 6.19                                  | 20 |
| D      | Teslin SP7 | Sil             | 35  | 1,607,799 (103,729) | 2.98                                  | 20 |
| E      |            |                 | 40  | 987,319 (63,698)    | 4.13                                  | 20 |
| F      |            |                 | 50  | 809,627 (52,234)    | 4.7                                   | 20 |
| G      |            |                 | 100 | 391,824 (25,279)    | 5.3                                   | 20 |
| H      | Teslin SP7 | CisPB           | 2   | 3,712,994 (239,548) | 2.8                                   | 20 |
| I      |            |                 | 5   | 2,451,728 (158,176) | 4.39                                  | 20 |
| J      |            |                 | 10  | 888,987 (57,354)    | 6.45                                  | 20 |
| K      |            |                 | 20  | 392,925 (25,350)    | 7.2                                   | 20 |
| L      | Teslin SP7 | Kton            | 5   | 293,570 (18,940)    | 4.4                                   | 20 |
| M      |            |                 | 10  | 116,606 (7,523)     | 4.7                                   | 20 |
| N      |            |                 | 20  | 46,887 (3,025)      | 5.0                                   | 20 |
| O      | Teslin SP7 | TPX             | 5   | 974,841 (62,893)    | 3.35                                  | 20 |
| P      |            |                 | 5   | 923,598 (59,587)    | 3.3                                   | 20 |
| Q      |            |                 | 2   | 2,798,478 (180,547) | 2.38                                  | 20 |

\*comparative example

\*\*permeability too high to measure

Table 2 (continued)

| Ex. No. | Substrate  | Coating Polymer |    | Permeability        |                                       |      |
|---------|------------|-----------------|----|---------------------|---------------------------------------|------|
|         |            | Type            | %  | OTR                 | Ratio CO <sub>2</sub> /O <sub>2</sub> | °C   |
| 3A      | Teslin SP7 | SCC2            | 10 | 637,592 (41,135)    | 4.94                                  | 20   |
| B       |            | SCC3            | 5  | 927,861 (59,862)    | 4.81                                  | 20   |
| C       |            | ACP             | 5  | 403,728 (26,047)    | 5.8                                   | 20   |
| D       |            | CisPB           | 5  | 2,092,934 (135,028) | 4.8                                   | 20   |
| E       |            | *CisPB + SCC8   | 5  | 1,205,559 (77,778)  | 5.3                                   | 20   |
| F       |            | SCC4            | 2  | 1,883,389 (121,509) | 3.3                                   | 20   |
| G       |            | SCC4            | 10 | 687,688 (44,367)    | 5.2                                   | 20   |
| H       |            | SCC5            | -  | 930,854 (60,055)    | 4.72                                  | 20   |
| I       |            | SCC6            | 10 | 812,959 (52,449)    | 5.10                                  | 20   |
| J       |            | SCC7            | 25 | 410,440 (26,480)    | 5.23                                  | 20   |
| 4A      | Teslin SP7 | CisPB           | 5  | 125,218 (80,786)    | 6.50                                  | 0    |
| B       |            | CisPB           | 5  | 1,367,875 (88,250)  | 6.09                                  | 5    |
| C       |            | CisPB           | 5  | 1,579,000 (101,871) | 5.51                                  | 10   |
| D       |            | CisPB           | 5  | 1,839,323 (118,666) | 5.43                                  | 15   |
| E       |            | CisPB           | 5  | 2,092,934 (135,028) | 4.82                                  | 20   |
| F       |            | CisPB           | 5  | 2,328,952 (150,255) | 4.55                                  | 25   |
| G       |            | *CisPB + SCC8   | 5  | 320,617 (20,685)    | 5.5                                   | 0    |
| H       |            | *CisPB + SCC8   | 5  | 394,304 (25,439)    | 5.5                                   | 5    |
| I       |            | *CisPB + SCC8   | 5  | 512,848 (33,087)    | 5.4                                   | 10   |
| J       |            | *CisPB + SCC8   | 5  | 722,455 (46,610)    | 5.3                                   | 15   |
| K       |            | *CisPB + SCC8   | 5  | 1,205,559 (77,778)  | 5.3                                   | 20   |
| L       |            | *CisPB + SCC8   | 5  | 1,520,379 (98,089)  | 5.2                                   | 25   |
| M       |            | SCC10           | 5  | 1,020,628 (65,847)  | 5.93                                  | 22.2 |

\*a mixture of CisPB (80 parts) and SCC8 (20 parts)

Table 2 (continued)

| Ex. No. | Substrate   | Coating Polymer |     | Permeability          |                                       |    |
|---------|-------------|-----------------|-----|-----------------------|---------------------------------------|----|
|         |             | Type            | %   | OTR                   | Ratio CO <sub>2</sub> /O <sub>2</sub> | °C |
| 5A      | Teslin SP7  | SCC11           | 6.5 | † 386,461 (24,933)    | 6.06                                  | 0  |
| B       |             |                 | 6.5 | † 521,141 (33,622)    | 6.16                                  | 5  |
| C       |             |                 | 6.5 | † 1,048,590 (67,651)  | 6.12                                  | 10 |
| D       |             |                 | 6.5 | † 1,474,933 (95,157)  | 5.78                                  | 15 |
| E       |             |                 | 6.5 | † 1,825,001 (117,742) | 5.53                                  | 20 |
| F       |             |                 | 6.5 | † 2,225,753 (143,597) | 5.21                                  | 25 |
| G       |             |                 | 6.5 | † 2,587,33 (166,926)  | 4.88                                  | 30 |
| 6       | Teslin SP7  | SCC12           | 6.5 | † 1,286,500 (83,000)  | 5.29                                  | 22 |
| 7A      | Teslin X457 | SCC13           | 2   | † 4,022,699 (259,529) | 3.92                                  | 22 |
| B       |             |                 | 1.5 | † 8,789,414 (567,059) | 2.62                                  | 22 |
| C       |             |                 | 1.3 | † 13160,662 (849,075) | 1.68                                  | 22 |
| 7D      | Teslin SP7  | SCC13           | 1   | † 8,693,239 (560,854) | 2.75                                  | 22 |
| E       |             |                 | 1.5 | † 3,262,486 (210,483) | 4.88                                  | 22 |
| F       |             |                 | 2   | † 2,766,083 (178,547) | 5.48                                  | 22 |
| G       |             |                 | 3   | † 1,869,005 (120,581) | 6.03                                  | 22 |
| 8       | Teslin SP7  | SCC13           | 3   | † 1,518,643 (97,977)  | 6.32                                  | 22 |
| 9       |             | SCC15           | 6.5 | † 1,758,196 (113,432) | 5.58                                  | 22 |
| 10      |             | SCC16           | 3.8 | † 1,113,241 (71,822)  | 7.06                                  | 22 |
| C1      | Roplast     | None            | -   | † 3,859 (249)         |                                       | 22 |
| C2      | BF915       | None            | -   | † 4,836 (312)         |                                       | 22 |
| C3      | LB710       | None            | -   | † 5,161 (333)         |                                       | 22 |
| C4      | CVP         | None            | -   | † 5,130 (331)         |                                       | 22 |

† OTR and COTR were measured at a pressure of 0.035 kg/cm<sup>2</sup> (0.5 psi) in Examples 5-10 and C1-C4.

Table 3

| Ex No                        | 3A   | 3B   | 3C   | 3D   | 3E   | 3F   | 3G   | 3H   | 3I   | 3J   |
|------------------------------|------|------|------|------|------|------|------|------|------|------|
| P <sub>10</sub><br>(0-10°C)  | 2.79 | 2.00 | 1.31 | 1.26 | 1.60 | 2.41 | 3.13 | -    | 4.72 | 4.33 |
| P <sub>10</sub><br>(20-30°C) | -    | -    | -    | 1.34 | 2.35 | -    | -    | 2.73 | -    | -    |

Table 4

| Ex No                     | 4A   | G    | 5A    | 8    | 9    | 10   | 11   | C1    | C2    | C3    | C4    |
|---------------------------|------|------|-------|------|------|------|------|-------|-------|-------|-------|
| P <sub>10</sub> (0-10°C)  | 1.26 | 1.6  | †2.71 | †1.4 | †2.4 | †2.8 | †3.5 | †1.54 | †1.82 | †1.74 | †1.79 |
| P <sub>10</sub> (10-20°C) | 1.33 | 2.35 | -     | -    | -    | -    | -    | -     | -     | -     | -     |

† OTR's in Examples 5A, 8-10 and C1-C4 were measured at a pressure of 0.035 kg/cm<sup>2</sup> (0.5 psi).

#### Example 11

A membrane was produced by coating SCC 10 at 8% concentration onto Teslin SP7. The resulting product was tacky to the touch. Second and third membranes were produced in the same way except that a crosslinking agent was added to the coating solution. The crosslinking agent was aluminum acetylacetonate (5%, based on polymer) or a polyfunctional aziridene (5%, based on polymer, available under the trade name XAMA 7 from Virginia Chemicals). The resulting products were much less tacky.

#### Example 12

This example illustrates the effect of calendering the coated microporous film. The OTR and R values and the thicknesses of a coated microporous film made by coating SCC1 onto Teslin SP7 were measured before calendering, after uniaxial calendering at 142 kg/linear cm (800 pli) or after uniaxial calendering at 269 kg/linear cm (1500 pli). The results are shown in Table 5 below.

Table 5

| Nip Pressure<br>kg/lin. cm (pli) | Thickness<br>mm (mils) | OTR                 | R    |
|----------------------------------|------------------------|---------------------|------|
| 0                                | 0.17 (6.9)             | 1,973,010 (127,291) | 3.82 |
| 142 (800)                        | 0.16 (6.3)             | 1,742,138 (112396)  | 4.09 |
| 169 (1500)                       | 0.157 (6.2)            | 1,485,473.5 (95837) | 4.64 |

Example 13

5        Example 13 is summarized in Table 6. Fresh broccoli was sealed into storage  
bags (23 x 28 cm) and stored for 13 days at 45°C, or for 9 days at 45°C and 4 days at  
55°C. Four control bags (C5 - C8) were composed entirely of polyethylenec. The other  
four bags (13A - 13D) were bags of the invention and were identical to the control bags  
except that a hole of 4.76 cm diameter was cut in the polyethylene and sealed by means of  
10 a membrane which had an O<sub>2</sub> permeability of 1,224,500 (79,000) and which had been  
prepared by coating Teslin SP7 with the SCC10 polymer. At the end of the storage  
period, the O<sub>2</sub> and CO<sub>2</sub> concentrations in the bag were measured. The results are shown  
in Table 5. The broccoli was then cooked for 1 minute in a microwave oven at the "high"  
setting. The broccoli from all the control bags had a strong and offensive odor and flavor  
15 before and after cooking. The broccoli from all the bags of the invention had no  
unpleasant odor or flavor before or after cooking; the broccoli stored at 45°C for all 13  
days was in even better condition than that stored at 45°C and 55°C.

Table 6

|     | Storage      |              | After Storage     |                  |
|-----|--------------|--------------|-------------------|------------------|
|     | Days at 45°C | Days at 55°C | % CO <sub>2</sub> | % O <sub>2</sub> |
| C5  | 13           | 0            | 8.3               | 0.29             |
| C6  | 13           | 0            | 8.0               | 0.79             |
| C7  | 9            | 4            | 9.1               | 0.46             |
| C8  | 9            | 4            | 8.5               | 0.32             |
| 13A | 13           | 0            | 4.1               | 2.89             |
| 13B | 13           | 0            | 4.8               | 10.9             |
| 13C | 9            | 4            | 4.1               | 1.04             |
| 13D | 9            | 4            | 4.3               | 1.00             |

Example 14

5 The following samples were used in this example.

Sample 14A Teslin SP7 which has been coated with a 10% solution of SCC4.

Sample 14B. A laminate of Sample 14A and Teslin SP7 laminated to the coated face of  
10 Sample 6A at about 50°C, applying pressure by means of a 8.85 kg (4 lb) roller.

Sample 14C Teslin SP7 which has been coated with a 1% solution of SCC13.

Sample 14D A laminate of Sample 14A and AKZO laminated to the coated face of  
15 Sample 14A in the same way as for Sample 14B.

The OTR's of samples 14A-D and 7B were measured (1) initially and (2) after folding four times (i.e. to 0.125 of original size) and unfolding. The results are shown in Table 7.

Table 7

| OTR           | 14A                 | 14B                 | 14C                      | 14D                   | 7B                      |
|---------------|---------------------|---------------------|--------------------------|-----------------------|-------------------------|
| Initial       | 687,735<br>(44,370) | 871,286<br>(56,212) | †8,693,237<br>(560,854)  | 1,277,711<br>(82,433) | †8,789,414<br>(567,059) |
| After folding | **                  | 852,500<br>(55,000) | †10,081,122<br>(650,395) | 1,282,857<br>(82,765) | †9,872,291<br>(636,922) |

\*\* too permeable to measure

† OTR's were measured at  $0.035 \text{ kg/cm}^2$  (0.5 psi) in Examples 14C and 7B

5

#### Example 15

A sample of AKZO film was heat-welded to Sample 14C. The heat weld was produced by an impulse sealer available from Packaging Aids Inc. under the trade name  
 10 Sealmaster 420. The force needed to break the resulting bond was more than the tear strength of the AKZO film.

#### Example 16

15 The following samples were used in this Example.

Sample 16A Teslin SP7 which had been coated with a 5% solution of SCC4.

Sample 16B A laminate of Sample 16A and Teslin SP7 in the Teslin being laminated to  
 20 the coated face of Sample 16A under heat and pressure.

Sample 16C A laminate of Sample 16A and Delnet, the Delnet being laminated to the coated face of Sample 16A under heat and pressure.

The O<sub>2</sub> permeabilities of samples 16B and 16C were measured initially, after folding as in Example 14, and after immersion in tap water for 10 minutes, followed by drying with a paper towel. The results are shown in Table 8.

5

Table 8

|     | OTR               |                   |                   |
|-----|-------------------|-------------------|-------------------|
|     | Initial           | After Folding     | After Immersion   |
| 16B | †871,286 (56,212) | †852,500 (55,000) | †479,213 (30,917) |
| 16C | †522,319 (33,698) | †489,009 (31,549) | †489,009 (31,549) |

† OTR's in Examples 16B and 16C were measured at 0.035 kg/cm<sup>2</sup> (0.5 psi)



CLAIMS

1. A gas-permeable membrane which comprises
- (a) a microporous polymeric film, and
  - 5 (b) a polymeric coating on the microporous film, the polymeric coating changing the permeability of the microporous film so that the membrane
    - (i) has a  $P_{10}$  ratio, over at least one 10°C range between -5 and 15°C, of at least 1.3;
    - (ii) has an oxygen permeability (OTR), at all temperatures between 20°  
10 and 25°C, of at least 775,000 ml/m<sup>2</sup>.atm.24 hrs (50,000 cc/100 inch<sup>2</sup>.atm.24 hrs; and
    - (iii) has a CO<sub>2</sub>/O<sub>2</sub> permeability ratio(R) of at least 1.5;
- the  $P_{10}$ , OTR and R values being measured at a pressure of 0.035 kg/cm<sup>2</sup> (0.5 psi)
- 15 2. A membrane according to claim 1 which has at least one of the following characteristics
- (1) the microporous film has an average pore size of less than 0.24 micron;
  - (2) the microporous film has a tear strength of at least 30g;
  - (3) the microporous film has a Sheffield Smoothness of at least 30;
  - 20 (4) the microporous film comprises a polymeric matrix comprising an essentially linear ultrahigh molecular weight polyethylene having an intrinsic viscosity of at least 18 deciliters/g;
  - (5) the microporous film comprises a polymeric matrix comprising an essentially linear ultrahigh molecular weight polypropylene having an  
25 intrinsic viscosity of at least 6 deciliters/g;
  - (6) the microporous film comprises a finely divided, particulate, substantially insoluble filler which is distributed throughout the film;
  - (7) the coating weight of the coating polymer is 1.7 to 2.9 g/m<sup>2</sup>; and
  - (8) the coating polymer is a crystalline polymer having a  $T_p$  of -5° to 15°C.
- 30

3. A membrane according to claim 1 or 2 which has a  $P_{10}$  ratio between 0 and 10°C of at least 2.6, the  $P_{10}$  being measured at a pressure of 0.035 kg/cm<sup>2</sup> (0.5 psi).
4. A membrane according to claim 1 or 2 which has a  $P_{10}$  ratio, over at least one 10°C range between -5°C and 15°C, of at least 2.6, an OTR at all temperatures between 20°C and 25°C of at least 1,550,000 ml/m<sup>2</sup>.atm.24 hrs (100,000 cc/inch<sup>2</sup>.atm.24 hrs, and an R ratio of at least 2.5, the  $P_{10}$ , OTR and R values being measured at a pressure of 0.035 kg/cm<sup>2</sup> (0.5 psi).
5. A membrane according to claim 1 wherein at least 90% of the pores have a pore size less than 0.24 micron, and which has a  $P_{10}$  ratio, over at least one 10°C range between -5 and 15°C of at least 1.3, an OTR of 775,000 to 3,100,000 ml/m<sup>2</sup>.atm.24 hrs (50,000 to 200,000 cc/100 inch<sup>2</sup>.atm.24 hrs), and an R ratio of at least 2, the  $P_{10}$ , OTR and R values being measured at a pressure of 0.7 kg/cm<sup>2</sup> (10 psi).
6. A membrane according to claim 5 which has at least one of the following characteristics
- (1) it has a  $P_{10}$  ratio of at least 1.3 over at least one 10°C temperature range between 0° and 15°C;
  - (2) it has a  $P_{10}$  ratio of at least 2 over at least one 10°C temperature range between 0° and 15°C;
  - (3) it has a  $P_{10}$  ratio of at least 2.5 over at least one 10°C temperature range between 0° and 15°C;
  - (4) it has an OTR of at least 1,550,000 ml/m<sup>2</sup>.atm.24 hrs (100,000 cc/100 inch<sup>2</sup>.atm.24 hrs);
  - (5) it has an OTR of at least 2,325,000 ml/m<sup>2</sup>.atm.24 hrs (150,000 cc/100 inch<sup>2</sup>.atm.24 hrs);
  - (6) it has an OTR of 775,000 to 3,100,000 ml/m<sup>2</sup>.atm.24 hrs (50,000 to 200,000 cc/100 inch<sup>2</sup>.atm.24 hrs) and an R value of more than  $(3.8 - 0.00000045P)$ , where P is the OTR in ml/m<sup>2</sup>.atm.24 hrs;

- (7) it has an OTR of 775,000 to 3,100,000 ml/m<sup>2</sup>.atm.24 hrs (50,000 to 200,000 cc/100 inch<sup>2</sup>.atm.24 hrs) and an R value of (3.8 - 0.0000045P) to (7.4 - 0.000016P), where P is the OTR in ml/m<sup>2</sup>.atm.24 hrs;
- (8) it has an OTR of 775,000 to 3,100,000 ml/m<sup>2</sup>.atm.24 hrs (50,000 to 200,000 cc/100 inch<sup>2</sup>.atm.24 hrs) and an R value of (3.8 - 0.0000045P) to (5.6 - 0.000084Pl), where Pl is the OTR in ml/m<sup>2</sup>.atm.24 hrs;
- (9) it has an R ratio of at least 2.5; and
- (10) it has an R ratio of at least 3.
- the P<sub>10</sub>, OTR and R values being measured at a pressure of 0.07 kg/cm<sup>2</sup> (10 psi).

7. A membrane according to claim 5 or 6 wherein the microporous film has at least one of the following characteristics:

- (1) substantially 100% of the pores have a pore size less than 0.24 micron;
- (2) at least 80% of the pores have a pore size less than 0.15 micron;
- (3) at least 70% of the pores have a pore size less than 0.11 micron;
- (4) the pores constitute 35 to 80% of the volume of the film;
- (5) the pores constitute 60 to 75% of the volume of the film;
- (6) it comprises a polymeric matrix composed of
- (a) essentially linear ultrahigh molecular weight polyethylene having an intrinsic viscosity of at least 18 deciliters/g, or
- (b) essentially linear ultrahigh molecular weight polypropylene having an intrinsic viscosity of at least 6 deciliters/g, or
- (c) a mixture of (a) and (b);
- (7) it comprises (i) a polymeric matrix, and (ii) 50 to 90% by weight, based on the weight of the microporous film, of a finely divided, particulate, substantially water-insoluble, siliceous filler which is distributed throughout the matrix; and
- (8) it has been calendered at a nip pressure of 17.8 to 266.6 kg/linear cm (100 to 1,500 pli) before or after the coating is formed thereon.

8. A membrane according to claim 5, 6 or 7 wherein the coating polymer has at least one of the following characteristics:

- (1) it is a crystalline polymer having a  $T_p$  of -5 to 40°C and a  $\Delta H$  of at least 5 J/g;
- 5 (2) it is a crystalline polymer having a  $T_p$  of 0 to 15°C and a  $\Delta H$  of at least 20 J/g;
- (3) it is a side chain crystalline polymer;
- (4) it is a side chain crystalline polymer in which  $T_p - T_o$  is less than 10°C;
- (5) it is a side chain crystalline polymer prepared by copolymerizing (i) at  
10 least one n-alkyl acrylate or methacrylate in which the n-alkyl group contains at least 12 carbon atoms and (ii) one or more comonomers selected from acrylic acid, methacrylic acid, and esters of acrylic or methacrylic acid in which the esterifying group contains less than 10 carbon atoms;
- 15 (6) it is cis-polybutadiene, poly(4-methylpentene), polydimethyl siloxane, or ethylene-propylene rubber; and
- (7) it has been crosslinked.

9. A package which is stored in air and which comprises

- 20 (a) a sealed container, and
- (b) within the sealed container, a respiring biological material and a packaging atmosphere around the biological material

the sealed container including one or more permeable control sections which provide substantially the only pathways for oxygen and carbon dioxide to enter or leave the  
25 packaging atmosphere, at least one said permeable control section being a gas-permeable membrane as claimed in any one of claims 1 to 4.

10. A package which is stored in air and which comprises

- (a) a sealed container, and

- (b) within the sealed container, a respiring biological material and a packaging atmosphere around the biological material

the sealed container including one or more permeable control sections which provide substantially the only pathways for oxygen and carbon dioxide to enter or leave the packaging atmosphere, at least one said permeable control section being a gas-permeable membrane as claimed in any one of claims 5 to 8:

11. A package according to claim 9 or 10 wherein the control section is in the form of a strip which extends across a complete dimension of the container.

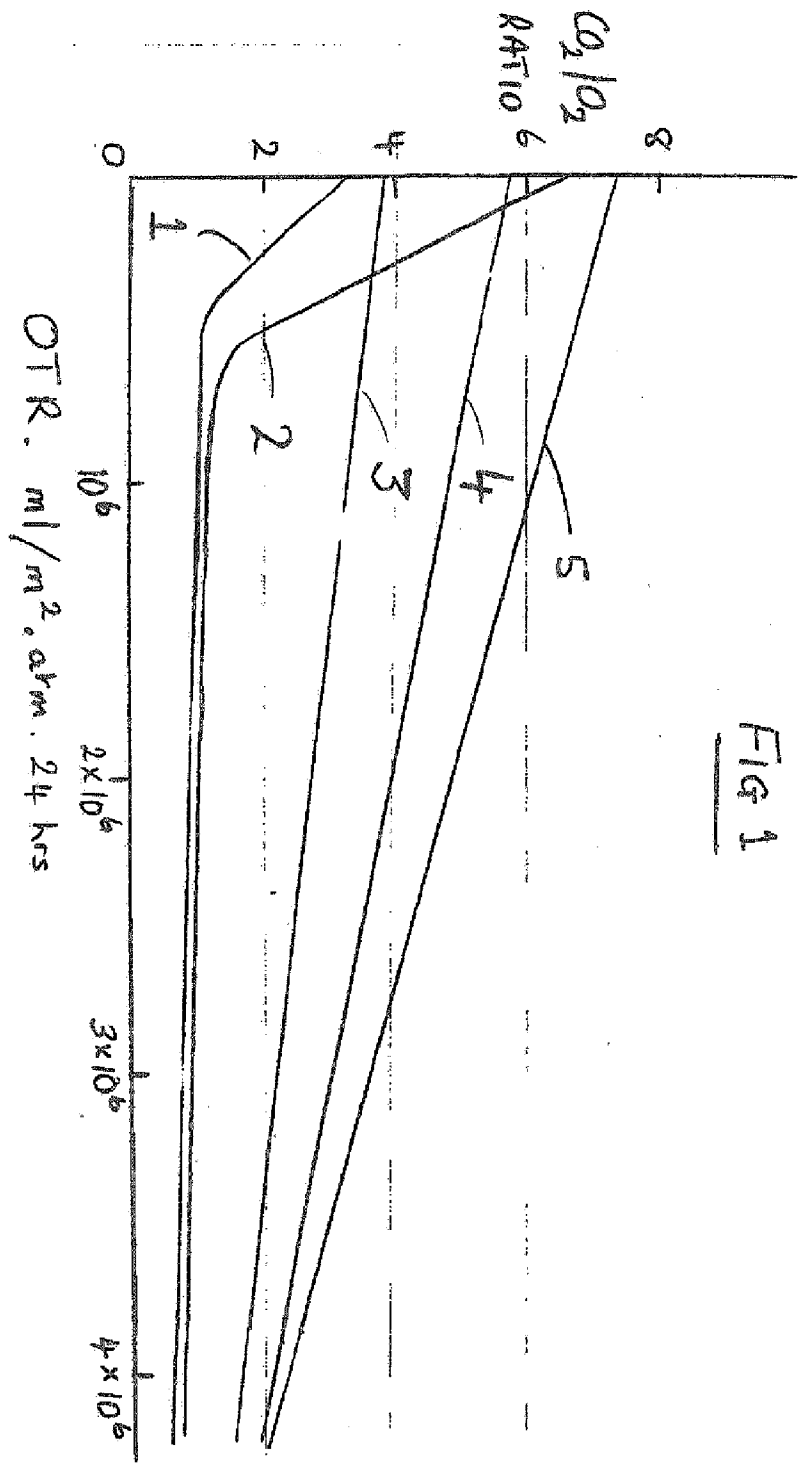


Fig 1

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 96/07939

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 C08J9/36 B65D81/24

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 C08J B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| X          | US,A,5 254 354 (R.F. STEWART) 19 October 1993<br>cited in the application<br>see claims 1-16<br>see examples 1,2,4,7<br>see tables 3,7,8<br>--- | 1-11                  |
| X          | WO,A,94 12040 (FRESH WESTERN MARKETING, INC.) 9 June 1994<br>see claims 1-6,10<br>see page 4, line 18-23<br>see examples 1-3<br>---             | 1-11                  |
| X          | US,A,5 160 768 (M.K.ANTOON, JR.) 3 November 1992<br>cited in the application<br>see claims 1-5<br>see examples 1-10<br>---                      | 1-11                  |
| -/--       |   |                       |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "Z" document member of the same patent family

Date of the actual completion of the international search

26 September 1996

Date of mailing of the international search report

02.10.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hallmeesch, A

# INTERNATIONAL SEARCH REPORT

Int'l Application No  
PCT/US 96/07939

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT |  |                       |
|--|--|-----------------------|
| Category *   | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A  | US,A,5 032 450 (T. RECHLICZ ET AL.) 16<br>July 1991<br>see claims 1-6<br>-----     | 1,2                   |

1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

page 2 of 2



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/07939

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)                      | Publication<br>date              |
|---|---------------------|---|----------------------------------|
| US-A-5254354                              | 19-10-93            | EP-A- 0560901<br>JP-T- 6504972<br>WO-A- 9210414 | 22-09-93<br>09-06-94<br>25-06-92 |
| WO-A-9412040                              | 09-06-94            | CN-A- 1089214<br>EP-A- 0676920                  | 13-07-94<br>18-10-95             |
| US-A-5160768                              | 03-11-92            | CA-A- 1329572                                   | 17-05-94                         |
| US-A-5032450                              | 16-07-91            | WO-A- 9111486                                   | 08-08-91                         |

Form PCT/ISA/210 (patent family annex) (July 1992)